AVC400

WALL MOUNT AIR CONDITIONER FOR INDOOR APPLICATION

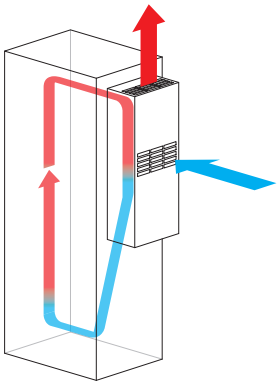

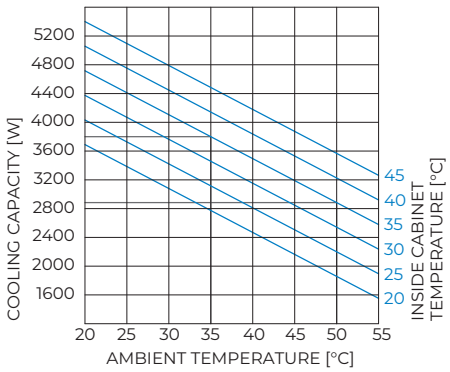

CONTROL TYPE			ARTICLE CODE
Digital thermostat with alarms			**AVC400.432**
Digital thermostat with alarms and RS485 port (ModBUS)			**AVC400.433**
FEATURES		**Unit**	
Power supply		V | ph| Hz	400 | 3 | 50 / 460 | 3 | 60
Cooling capacity EN14511	A35-A35	W	3800 / 3980
	A35-A50	W	2800 / 3160
Absorbed electric power EN14511	A35-A35	W	2200 / 2320
	A35-A50	W	2600 / 2750
Rated current		A	2.7 / 3.0
Motor circuit breaker / Delayed pre fuse (advised)		A	16
Electrical connection		-	quick connector
Air flow rate (free blow)	enclosure	m^3/h	860/950
Operating temperature	ambient	°C (°F)	+20 / +55 (+68 / +131) | +20 / +50 (+68 / +122)
	enclosure	°C (°F)	+20 / +45 (+68 / +113)
Refrigerant /charge		- | g	R134a | 1000
Condensate management		-	Condensate evaporator with safety overflow
Protection degree EN60529/1	ambient	-	IP34
	enclosure	-	IP54 (when installed on enclosure with the same protection degree)
Design	casing	-	Galvanised sheet steel
	cover	-	Galvanised sheet steel powder coated RAL7035
		-	stainless steel AISI304 (add 0X at the end of the article code)
Package Dimension H x W x D		mm	1610x435x290
Weight (with packaging)		kg	75 (78)
Conformity / Certifications		-	CE

Accessories	
Door limit switch	FINCOR
Kit air filter polyurethane mat	KFV.05P
Flow diverter	FD400

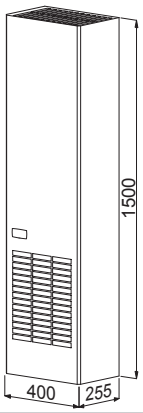

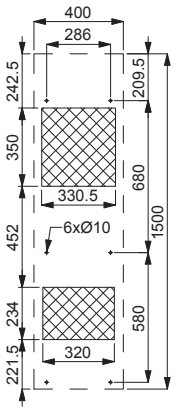

MOUNTING CUT-OUT

Specifications, values and drawings are subject to change without notice.