ATV 32

IP54		ATV3000	ATV3200	ATV3201	ATV3224	ATV3248
Type12 c UL us LISTED File n. E301228		ATV3000U	ATV3200U	ATV3201U	ATV3224U	ATV3248U
Air flow rate (free blow)	m3/h	-	115 (125)		115	
Air flow rate with exit filter	m3/h	-	84 (97)		84	
Filter mat 16890	-	60%				
IP55		**ATV300055**	**ATV320055**	**ATV320155**	**ATV322455**	**ATV324855**
IP55 UV resistant c UL us LISTED Type3R File n. E301228		**ATV3000V**	**ATV3200V**	**ATV3201V**	**ATV3224V**	**ATV3248V**
Air flow rate (free blow)	m3/h	-	94 (102)		94	
Air flow rate with exit filter	m3/h	-	62 (71)		62	
Filter mat ISO 16890	-	70%				
Power supply	V/Hz	-	230 / 50-60	115 / 50-60	24 DC	48 DC
Dimensions HxWxD	mm	204x204x37	204x204x104			
Power consumption	W	-	22 (21)		9	13
Current consumption	A	-	0.14 (0.12)	0.26 (0.24)	0.37	0.27
Overcurrent protection	-	-	impedance			
Electrical connection	-	-	3-poles spring terminals *		2-poles spring terminals *	
Duty cycle	-	-	100%			
Operating temperature	°C (°F)	-10 / +70 (+14 / +158)				
Class	-	-	Class I			
Noise level	dB(A)	-	43 (49)		45	
Flow direction	-	-	reversible, default factory setting outside-in			
Bearing	-	-	ball			
Service life (at 40°C)	hr	-	50 000			
Material	-	thermoplastic UL94V-0, color RAL7035				
		(IP55 UV resistant): thermoplastic UL94V-0 UV resistant, color RAL7035				
Wall thickness	mm	1.2 - 2.4				
Gasket	-	Foam seal gasket				
Weight (with packaging)	kg	0.32 (0.42)	0.98 (1.18)		0.70 (0.90)	
Package dimensions H x W x D	mm	220x220x43	220x220x110			
Mounting	-	Fast clip-on				
Conformity/Certifications	-	CE,UL c UL us LISTED (model with U letter at the end of the code)				

* 0.5-2.5mm2

Accessories

Thermostat 0-60°C, NO contact	-	THV2	
Fan speed controller	-	FSC1	-
Hood for IP56	CUFF20B		

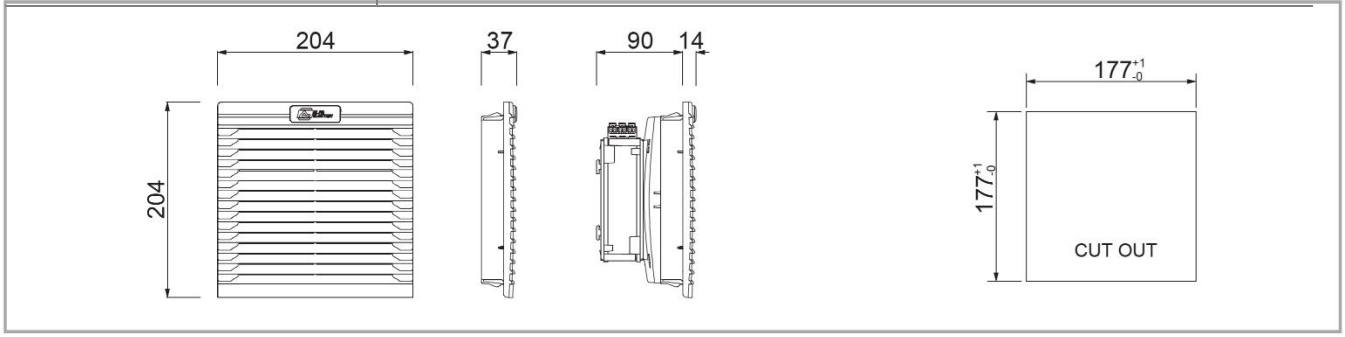

Specifications, values and drawings are subject to change without notice.